



TRANSPORTATION SPECS - Rough Terrain Cranes

TADANO MODEL GR550XL-2 - 55 TON CAPACITY

COMPONENT WEIGHTS

		<u>LBS.</u>	<u>KGS.</u>
Complete Crane (incl. block, ball & jib)	(1)	74,670	33,870

ADDITIONAL INFORMATION

55 Ton Block (5 sheave)		1,172	522
6.2 Ton Ball		330	150
Base Jib (28' 11")		1,380	626
Top Jib (21' 1")		500	227
Rooster Sheave		110	50
Main Load Line (3/4" x 633')			
Auxiliary Hoist Line (3/4" x 361')			
Tire Size 23.5-25 32PR			

TRANSPORTATION

Alberta and Saskatchewan

	<u>Weight</u>	<u>Trailer</u>
<input type="checkbox"/> Spring	(1)	28 WHL
<input type="checkbox"/> Summer	(1)	24 SHL
<input type="checkbox"/> Fall	(1)	20 WHL
<input type="checkbox"/> Winter	(1)	16 SHL

British Columbia

<input type="checkbox"/> Ban Max 80,000 lb		9 Axle
<input type="checkbox"/> Post Ban Stay on 85,000 kg corridor		7 Axle

Colorado


	<u>Weight</u>	<u>Trailer</u>
<input type="checkbox"/> Interstate	(1)	9 axle

Saskatchewan

<input type="checkbox"/> Ban	(1)	32WHL/9 axle
<input type="checkbox"/> Post Ban	(1)	24WHL/7 axle

STERLING CRANE

DIMENSIONS

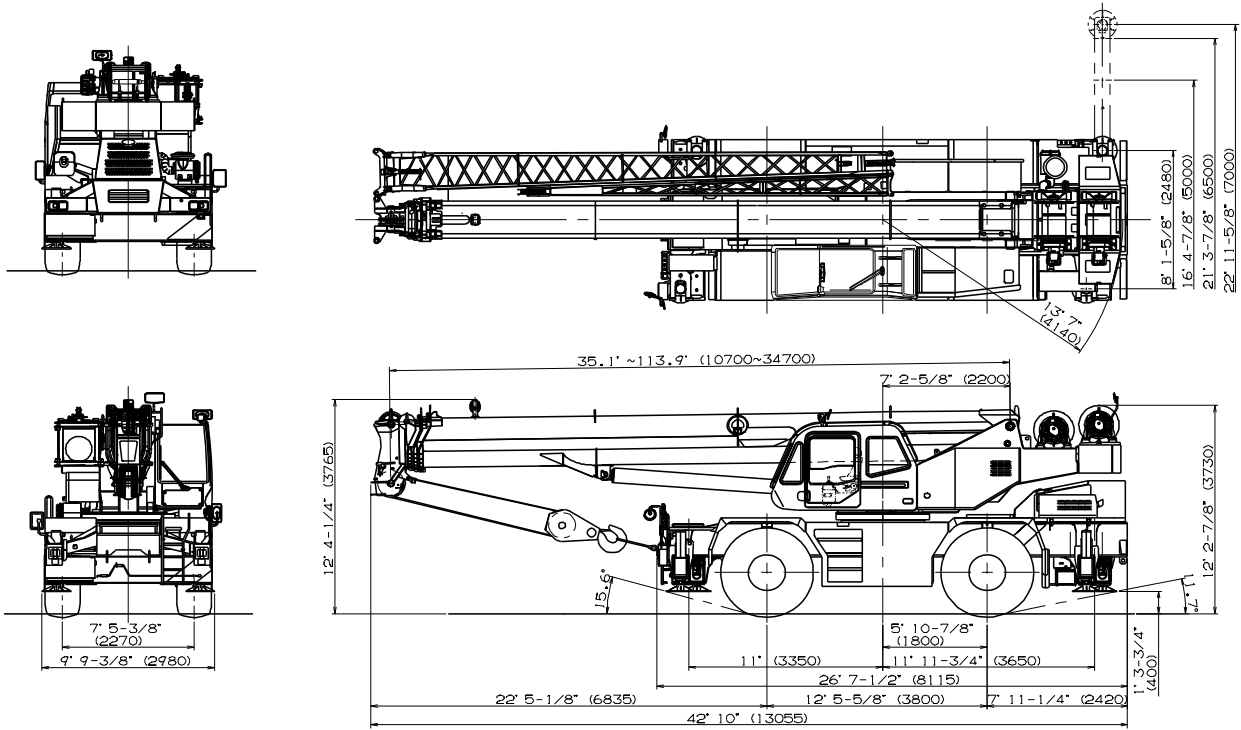

Note : Dimension is with boom angle at -0.8 degree.

GENERAL DIMENSIONS (23.5 - 25 Tires)

	Feet	Meters
Turning radius		
4 wheel steer	22'	6.7
2 wheel steer	38' 5"	11.7

Specifications are subject to change without notice.