

STERLING CRANE




TRANSPORTATION SPECS - Rough Terrain Cranes

TADANO MODEL GR1600XL-2 - 160 TON CAPACITY

<u>COMPONENT WEIGHTS</u>	<u>LBS.</u>	<u>KGS.</u>
Complete Crane (incl. counterweight, block, ball & jib)	175,701	79 697
Crane w/o removable counterweight	135,665	61 537
 <u>ADDITIONAL INFORMATION</u>		
100 Ton Block (8 sheave)	2,046	928
7.3 Ton Ball	360	164
Pinned Offset Fly Jib (33'9")	3,197	1 450
Main Load Line (3/4" x 1050')		
Auxiliary Hoist Line (3/4" x 738')		
Tire Size 26.5 R25		
Removable Counterweight (with Auxiliary Hoist & Wire Rope)	64,600	29 302

STERLING CRANE

DIMENSIONS

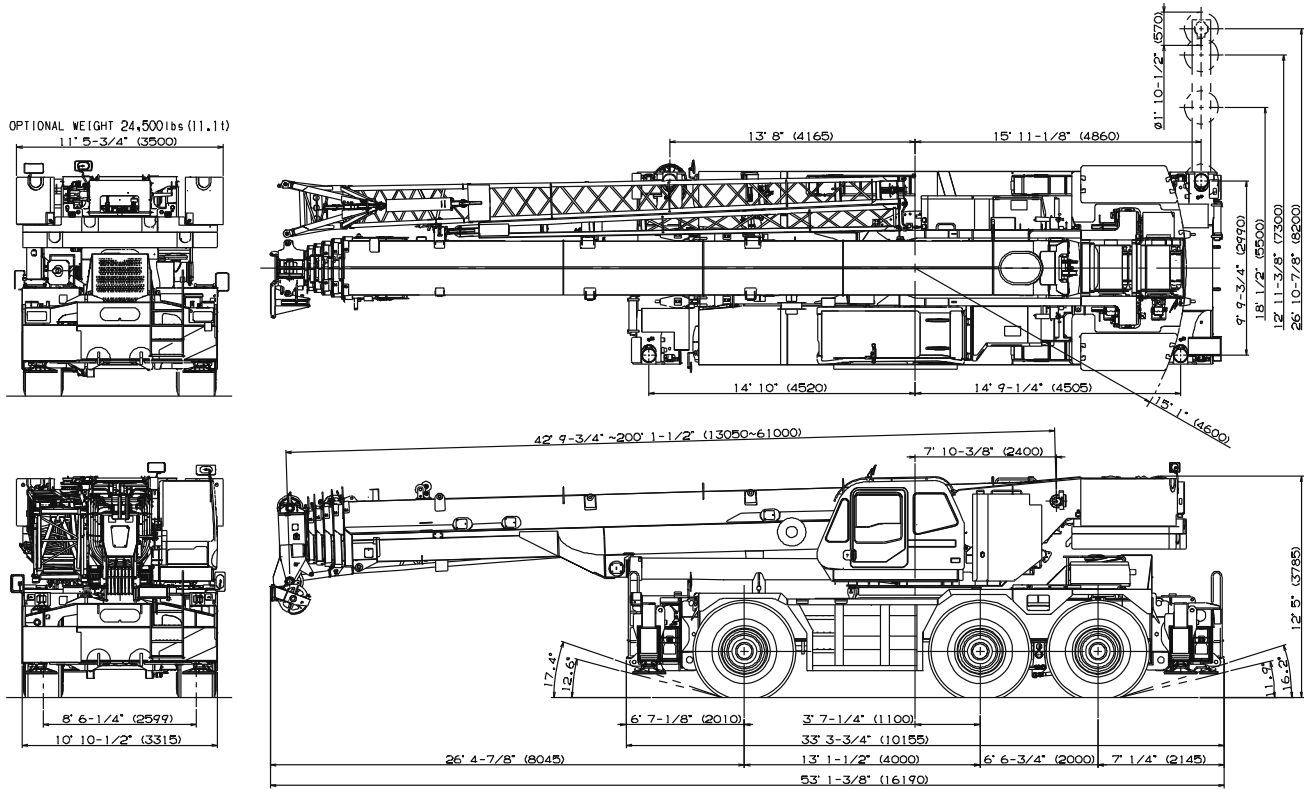

Note : Dimension is with boom angle at -1.5 degree.

GENERAL DIMENSIONS (26.5 R25 Tires)

	Feet	Meters
Turning radius		
6 wheel steer	32' 6"	9.9
2 wheel steer	48' 11"	14.9
Tail swing of counterweight	15' 1"	4.6

Specifications are subject to change without notice.